



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 18 NOV 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

IB/04/52405

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03104316.9

BEST AVAILABLE COPY

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 03104316.9  
Demande no:

Anmeldetag:  
Date of filing: 21.11.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Philips Intellectual Property & Standards  
GmbH  
Steindamm 94  
20099 Hamburg  
ALLEMAGNE  
Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Text segmentation and label assignment with user interaction by means of topic  
specific language models and topic-specific label statistics

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G06F17/20

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

**DESCRIPTION**

Text segmentation and label assignment with user interaction by means of topic specific language models and topic-specific label statistics

**Field of the invention**

- 5 The present invention relates to the field of generating structured documents from unstructured text by segmenting unstructured text into text sections and assigning a label to each section as section heading. The text segmentation as well as the assignment of labels to text sections also denoted as labelling is provided to a user having control of the segmentation and the labelling procedure.

10

**Background and prior art**

- Text documents that are generated by a speech to text transcription process usually do not provide any structure since conventional speech to text transcription systems or speech recognition systems only literally transcribe the recorded speech into
- 15 corresponding text. Explicitly dictated commands of text formatting, text highlighting, punctuation or text headings have to be properly recognized and processed by the speech recognition system or by a text formatting procedure being successively applied to the text generated by the speech recognition process.
- 20 Both automatic speech recognition as well as automatic text formatting systems that are typically based on training data and/or manually designed text formatting rules inevitably produce errors because of a lack of human expertise which is needed to properly identify complex formatting commands, section boundaries as well as distinct text portions, e.g. representing a section heading. The result of an ordinary speech to
- 25 text transcription process or text formatting process therefore has to be provided to a human proof reader. The proof reader has to browse through the entire document thereby gathering information about the content of the document and to decide whether the speech to text transcription process produced reasonable results and whether a text formatting has been performed correctly with respect to the content of the document.

The task of the proof reader even aggravates when the structure of a document is not explicitly dictated, i.e. many headings and section boundaries are not explicitly encoded in the spoken dictation. Furthermore, when even sentence structures, i.e. punctuation symbols, are rarely dictated, these punctuation symbols have to be manually inserted by the proof reader.

Especially the partitioning of a text into sections is a rather demanding task for a proof reader because the detection of a change of a section type cannot be decided before a longer part of the new section has been read by the proof reader. Here the proof reader has to jump back to some position in the already examined text in order to insert a section boundary and an appropriate heading. In particular the permanent jumping between different positions in the document is very time consuming and exhausting for the human proof reader.

15

The present invention aims to provide a method, a computer program product, a text segmentation system as well as a user interface for a text segmentation system in order to perform a segmentation and labelling of an unstructured text in response to a user's decision.

20

### **Summary of the invention**

The present invention provides an efficient user interface for a text processing system which employs a method of segmentation of a text into text sections, of assigning a topic to each section, and of assigning a label in form of a section heading to each text section. These tasks are performed using statistical models which are trained on the basis of annotated training data. First, the method performs a segmentation of the text into text sections by making use of the statistical models extracted from the training data. After the text has been segmented into text sections, each text section is assigned with a topic being indicative of the content of the text section. The assignment of the topic to a text section makes also use of the statistical models extracted from the

25  
30

training data. After the text segmentation and the topic assignment has been performed, a structured text is generated by inserting a label as a section heading into the text. The label is inserted in the text at a position corresponding to a section border in such a way that the label is directly followed by the section it refers to. This inserted label is to be  
5 understood as a heading which precedes the following text section.

When the structured text has been generated in the above described way, the structured text is provided to a user having control of the segmentation, the topic assignment and the general structuring of the text. The method finally performs modifications of the  
10 structured text in response to the user's review.

According to a preferred embodiment of the invention, the insertion of labels as section headings comprises a text formatting procedure incorporating formatting steps such as punctuating, highlighting, indenting and modifying the type face.  
15

According to a further preferred embodiment of the invention, the topic assignment to a text section also comprises the assignment of a set of labels to the text section. One label of the set of assigned labels is finally inserted as a section heading into the text. Here, a topic represents a rather abstract declaration of a distinct class or type of section.  
20 Such a declaration is particularly applicable to so-called organized documents following a typical or predefined structure. For example a medical report features a topic sequence like demographic header, patient history, physical examination and medication.

Each section of such a structured document can be identified by an abstract topic. In  
25 contrast to the abstract topic, a label is indicative of a concrete heading of such a section. For example the section referring to an examination of the patient can be labelled in a plurality of different ways, such as "physical examination", "examination", "exam", "surgical examination". No matter how a section of text is labelled, the content of the section, i.e. in this case an examination, is identified by the assigned topic.

The segmentation of the text into text sections can for example be performed by a method disclosed in US Pat. No. 6,052,657 making use of language models and language model scores in order to indicate a correlation between a block of text and a language model. A more accurate and reliable procedure for text segmentation and topic  
5 assignment is disclosed in the patent application "text segmentation and topic annotation for document structuring" filed by the same applicant herewith concurrently. This document describes a statistical model for text segmentation and topic annotation by making explicit use of a topic sequence probability, a topic position probability, a section length probability as well as a text emission probability. These probabilities are  
10 especially helpful when the underlying annotated training data refer to organized documents.

According to a further preferred embodiment of the invention, the assignment of one label of the set of labels to a text section, and inserting the one assigned label as a  
15 section heading of the text section into the text, accounts for count statistics based on the training data and/or explicit or partial verbalizations found at the beginning of a section. The count statistics reflects the observed frequency that a section assigned to some topic is preceded by a specific label. In this way, the most frequently assigned label per topic may be selected as a default heading if no other hints about the most  
20 suitable label or heading are found in the text. In other words by means of a count statistic a default label is assigned to a text section.

Alternatively, the label assignment based on the count statistic is overruled when an explicit verbalization is found at the beginning of a section exactly matching one of the  
25 set of labels being assigned to the section. Furthermore, if no label matches exactly with an explicit verbalization found at the beginning of a section, then a label matching only partially some verbalization found at the beginning of the section may be inserted instead of the default label. The assignment of one label to a text section, i.e. the selection of one label of the set of labels being assigned to the text section, can also be



performed with respect to the count statistics based on the training data in combination with explicit full or partial verbalizations found at the beginning of a section.

According to a further preferred embodiment of the invention, if some full or partial  
5 verbalization is found at the beginning of the section, this verbalization may be removed from the section. This is useful, if the verbalization represents an explicitly dictated heading which is replaced by the inserted label. As an example, a section starting with “medications the patient takes ...” can be assigned to the label “medications”. Since this label serves as a heading for the subsequent section, the term “medications” itself  
10 should be removed from the text of the section leaving the proper content of the section starting with “the patient takes ...”. Modifications of this strategy include the removal of some predefined filler words which may be part of the dictated heading or initial phrase of some section, even if these filler words are not part of the label, e.g. if some section starts with “medications are X, Y, Z, ...” which is converted into the heading  
15 “medications” followed by the list of medications “X, Y, Z, ...” where the filler word “are” is skipped.

According to a further preferred embodiment of the invention, the insertion of a section heading into the text e.g. due to an exact matching between an explicit verbalization and  
20 a label can be overruled by the user. In this case, the insertion is reversed by the method and the original text portion is restored. More specifically, if some section-initial words have been removed due to a match with the assigned label, these words have to be re-inserted when the user decides for a different label which does not match these removed words.

25

According to a further preferred embodiment of the invention, the providing of the structured text to a user further comprises providing of the complete set of labels being assigned to each text section. Since each label of the set of labels represents an alternative for the section heading, the user can easily compare the automatically  
30 inserted section heading with alternative headings.

According to a further preferred embodiment of the invention, the providing of the structured text to a user further comprises providing indications of alternative section borders. In this way not only the section borders automatically inserted into the text by  
5 the present method are visible to the user, but also alternative section borders are  
provided to the user for an easier and facilitated proof reading. In this way the proof reader's task to find the correct section borders of the document is reduced to the retrieval of automatically inserted section borders and alternative section borders.

10 According to a further preferred embodiment of the invention, modifications of the structured text in response to the user's review refer to the modification of the segmentation of the text into text sections and/or modifications of the assignment between labels and text sections. Furthermore modifications of performed formatting such as punctuation, highlighting and the like are also conceivable.

15

According to a further preferred embodiment of the invention, modifications of the text segmentation and modifications of the assignment of labels to text sections performed in response to the user's review are initiated by the user selecting one of the provided labels or one of the alternative section borders. The modification selected by the user is  
20 then performed by the present method, replacing a section heading by a selected section heading, or shifting a section border.

Accomplishing a first text modification may imply that a second text modification has to be performed. For example when the section headings are enumerated, the removal of  
25 a text section requires a re-enumeration of the successive text sections or section labels. Therefore, the present invention is further adapted to dynamically perform modifications that are due to a prior modification performed in response to the user's review.



According to a further preferred embodiment of the invention, a modification of the assignment of a label to a text section as a section heading is performed in response of the user either selecting one label of the provided set of labels being assigned to the text section or by entering a user defined label and assigning this user defined label as  
5 section heading to the text section. In this way the user can quickly and effectively identify one label of the provided set of labels as the correct section heading or alternatively define a previously unknown heading to the relevant text section.

The selection of one label of a set of a labels as well as the entering of a label is not  
10 restricted to positions in the text that were identified as section borders but moreover an appropriate set of labels can be provided at any position in the text upon user request. In this way the user still has complete control of structuring and labelling the document.

According to a further preferred embodiment of the invention, the processing of  
15 modifications in response to the user's review successively triggers a re-segmentation of the text into text sections and a regeneration of a structured text by inserting labels as section headings referring to text sections. Both the re-segmentation as well as the regeneration of the structured text make use of the statistical models extracted from the training data and make reference to already performed modifications that were  
20 processed in response to the user's review. When for example a user has introduced a modification in the text either in the form of a redefinition of a section border or in the form of re-labelling a section heading, the method of the present invention performs a successive re-segmentation and regeneration of the structured text by leaving the initially performed modifications of the user unaltered. In this way modifications  
25 introduced by the user are never overruled or re-modified by the inventive method.

According to a further preferred embodiment of the invention, the re-segmentation of the text into sections as well as the regeneration of the structured text by inserting labels as section headings is performed dynamically during a review process performed by the  
30 proof reader or user. The re-segmentation of the text as well as the regeneration of the

structured text can either be applied to all text sections, to the current and all following sections, or to a single section if specified by the user. For example when a new section boundary is introduced or when a heading is removed by the user, it is reasonable that a further restructuring or heading update is restricted to the current section only. In this way the method can faster respond to small, hence local changes that have to be introduced into the text.

According to a further preferred embodiment of the invention, the granularity of the text segmentation can be controlled by the user by customizing a so-called granularity parameter. In this way the user can determine whether the text is structured in a finer or coarser way. A change of the customizable granularity parameter results into removal or insertion of text sections.

According to a further preferred embodiment of the invention, modifications that are performed in response to the user's review are logged and analyzed by the present method in order to further train the statistical models. In this way the entire method can effectively be adapted to the user's preferences. When for example a distinct label has been repeatedly removed from the text by the user, the method of text segmentation restrains to insert this distinct section heading in future applications. The impact of the user's modification on the adaptation of the method – hence the sensitivity of the adaptation – may be also controlled by the user. This means that for example an insertion or a removal of a label has to occur several predefined times before the method adapts to this particular user introduced modification. The number of how often a change has to manually inserted until the method adapts to the introduced change may be given by the user.

Furthermore, the adaptation of the method towards user introduced modifications can already refer to successive sections in the present document. The method adapts to modifications introduced by the user in the beginning part of a document and automatically performs corresponding modifications within successive text sections.

The adaptation therefore applies to a present document as well as to future documents to which the inventive method is applied to.

### **Brief description of the drawings**

- 5 In the following, preferred embodiments of the invention will be described in greater detail by making reference to the drawings in which:

Figure 1 illustrates a flow chart of the segmentation method of the present invention,

- 10 Figure 2 illustrates a flow chart for text segmentation incorporating analyzation of user introduced modifications,

Figure 3 illustrates a flow chart of an implementation of the present invention into a speech recognition process,

Figure 4 shows a block diagram of the user interface of the present invention,

- 15 Figure 5 shows a block diagram of the segmentation system.

### **Detailed Description**

- Figure 1 illustrates a flow chart of the text segmentation and topic assigning method. In the first step 100 an unstructured text generated e.g. by a speech to text transcription
- 20 system is inputted. Based on the inputted text, in step 102 the method performs a structuring and topic assignment of the text by segmenting the text into text sections and assigning a topic to each text section. In order to perform the text segmentation and topic assignment in step 102, language or statistical models being extracted from training data are provided to step 102 by step 104. Step 105 provides a label count
- 25 statistics indicating the probability that a label is assigned to a topic. Based on the training data, the label count statistics reflects how often a label is assigned to a topic.

- In step 106 a label is assigned to each text section as a section heading and inserted at the appropriate position into the text by making reference to the count statistics
- 30 provided by step 105 and the segmented text provided by step 102. After the label

assignment has been performed by step 106 the segmented text and the inserted labels as well as alternative labels are provided to a user in step 108. Furthermore alternative section boundaries are provided to the user in step 108. In the successive step 110 the user decides whether the provided segmentation and label assignment of step 108 is  
5 acceptable. Alternatively the user can select alternative headings provided by step 108 or alternative segmentations provided by alternative section boundaries.

If none of the provided alternatives satisfies the user's preferences, the user can also enter a section boundary as well as a section heading. In response to the user's decision  
10 of step 110, the user's decision is processed by the method in step 112. Processing of the user's decision comprises replacing inserted section headings, re-labelling successive section headings, restructuring successive or part of the document or restructuring and re-labelling the entire document. Furthermore a dynamical processing of user introduced modifications is also conceivable. Dynamic processing means, that a  
15 user introduced modification automatically triggers further modifications that are related to proceeding text sections or modifications to be performed during a successive application of the structuring method.

After the user decision has been processed in step 112 the resulting modifications are  
20 performed in the following step 114.

Figure 2 is illustrative of a flow chart of the text segmentation and text assignment method incorporating analyzation of user introduced modifications. In a first step 200 an unstructured text resulting from e.g. a speech to text transcription process, is  
25 provided to step 202. In step 202 a text segmentation into text sections is performed by making use of language or statistical models provided by step 204. Furthermore in step 202 a topic is assigned to each text section by making use of the statistical information stored in the language model provided by step 204.

After the text has been segmented into text sections and after each text section has been assigned to a topic in step 202, in the proceeding step 206 a label is assigned to each text section as a section heading and inserted at the appropriate position in the text. The assignment of a label performed in step 206 makes explicit use of the label count  
5 statistics being provided to step 206 by step 205. Based on the training data, the label count statistics reflects how often a label is assigned to a topic.

After the text has been structured by means of segmenting the text into text sections, assigning a topic to each text section and further assigning a label to each text section,  
10 the segmented text, the assigned headings as well as alternatives are provided to a user in step 208. The alternatives provided to the user refer to alternative text segmentations as well as alternative section labels. In the proceeding step 210 the user decides whether to accept the performed segmentation of the text and the performed assignment of section labels or to select one of the provided alternatives. Furthermore the user can also  
15 enter an arbitrary segmentation as well as an arbitrary section heading according to his or her preference. After the user decision of step 210, in the following step 214 the method checks whether any modifications have been introduced by the user. When in step 214 no user introduced modification has been detected the method ends in step 218 resulting in a structured and labelled text as performed in step 206. In contrast when in  
20 step 214 a user introduced modification has been detected, the method proceeds with step 212 in which the user introduced modifications are processed and performed. The processing and performing of a user's decisions incorporates a multiplicity of different text segmentation, text labelling as well as text formatting procedures.

25 After the user decision has been processed and performed in step 212 the method proceeds with step 216. In step 216 the user introduced modifications are stored as external conditions for a next application of the structuring and assigning procedure. Depending on the type of user modification referring to the text structuring or to the label assignment of text sections after step 216, the method either returns to step 202 or  
30 to step 206 in which a new structuring or a new label assignment is performed.

---



In a similar way a new restructuring and reassignment of the text performed by step 202 and 206 explicitly accounts for already performed modifications provided by step 216. In this way it can be guaranteed that user performed modifications are never overruled  
5 by the text structuring step 202 and the label assignment step 206.

Figure 3 is illustrative of an implementation of the text segmentation and topic assignment method into a speech recognition system. In step 300 speech is inputted into the system. In the following step 302 a first portion of the speech,  $p=1$  is selected. The  
10 first portion of speech selected by step 302 is provided to step 304 performing a speech to text transcription by making use of a language model  $m$ . The language model  $m$  is provided by step 306 to step 304. After the speech portion  $p$  has been transcribed into a text portion  $t$  by step 304, the resulting text portion  $t$  corresponding to the speech portion  $p$  is stored in step 308. In the proceeding step 310 the speech portion index  $p$  is  
15 compared to  $p_{\max}$  indicating the last portion of the speech. If  $p$  is less than  $p_{\max}$ ,  $p$  is incremented by 1 and the method returns to step 304. The steps 304, 308 and 310 are repeatedly applied until the speech portion index  $p$  equals the last speech portion  $p_{\max}$ . In this case the entire speech signal has been transcribed into text. The resulting text then comprises a plurality of text portions  $t$  corresponding to the portions of the speech.  
20  $p$ .

Based on the transcribed text, in step 312, a segmentation of the text into text sections is performed and each of the text sections is assigned to a topic being specific of the content of each section. This segmentation procedure of step 312 makes use of  
25 statistical models designed for text segmentation that are provided to step 312 by step 314. When the text has been segmented and assigned to topics in step 312, in the succeeding step 316, the topic assigned to each text section as well as the corresponding speech portions  $p'$  of the text sections are determined. Based on this determination, a second speech recognition of the speech portions  $p'$  referring to a distinct section can be  
30 performed in the following step 318. Depending on the topic being assigned to a text

section, a topic specific language model for the second speech recognition is provided by step 306. Since the speech has been transcribed stepwise in the procedure described by the steps 300 through 310, a repeated speech recognition can selectively be performed for distinct sections of text that correspond to speech portions p'.

5

When the repeated speech recognition step has been performed for each section of the text, a user can introduce further modifications referring to the segmentation of the text in step 320. According to the user introduced modifications of step 320, the method returns to the text segmenting step 312. Here, depending on the user's feedback, a new  
10 segmentation may take place and/or sections may be re-assigned to topics and labels.

When the performed text segmentations of step 312 and the repeated speech recognition of step 318 are both accepted by the user, the method ends with step 322.

15 The assignment between a topic and a section performed in step 316, as well as the speech transcription performed by step 304, can also make explicit use of a method of text segmentation and topic annotation as described in the patent application "Text segmentation and topic annotation for document structuring" and by the patent application "Topic specific models for text formatting and speech recognition" filed by  
20 the same applicant herewith concurrently.

In this way the expertise of a human proof reader can be universally and effectively coupled into a text segmentation and text labelling as well as into a corresponding speech recognition procedure.

25

Figure 4 shows a block diagram of a user interface of the present invention. The user interface 400 is preferably adapted as a graphical user interface. The user interface 400 comprises a text window 402 and a suggestion window 404. The text that has been subject to text segmentation and label assignment is provided within the text window  
30 402. A label 406 that has been inserted as a section heading into the text is highlighted

for better retrieval within the text provided in the text window 402. When for example the user makes use of a pointer 408, the user can select the label 406 and in response to the selection of the label 406 a label list 410 is provided within the user interface. The label list 410 provides a whole set of labels 412, 414, 416 that serve as alternative labels  
5 that can be inserted instead of label 406 into the text.

Additionally or alternatively the label list 410 can also be provided within the suggestion window 404. By means of the pointer 408 the user can select one of the labels 412, 414, 416 provided by the label list 410 to replace the label 406 in the given  
10 text. When none of the labels 406, 412, 414, 416 matches the user's preferences, the user can enter a label by making use of the user input field 418. Once an alternative label has been selected or entered by the user, the label 406 is replaced by the alternative label. In a similar way the segmentation of the text with alternative text segmentations in the form of alternative section boundaries is provided to the user and can be  
15 performed upon a user's selection.

Figure 5 shows a block diagram of a segmentation system of the present invention. The segmentation system 500 comprises a graphical user interface 520, a structured text module 518 for storing structured text, a processing unit 516, a statistical model module  
20 514 storing statistical models, an unstructured text module 512 storing unstructured text and a speech recognition module 510 performing speech to text transcription. The segmentation system 500 is connected to an external storage device 508 and to an input device 504. A user 506 can interact with the segmentation system via the input device 504 and the graphical user interface 520 of the segmentation system 500.

25

Speech 502 that is inputted into the segmentation system is processed by the speech recognition module 510. The speech recognition module 510 is connected to the unstructured text module 512 where the unstructured text resulting from the speech to text transcription process is stored. The unstructured text module 512 is connected to  
30 the processing unit 516 in order to provide the unstructured text to the processing unit

516. The processing unit 516 is bidirectionally connected to the statistical model module 514. By making use of the statistical information provided by the statistical models stored in the statistical model module 514, the processing unit 516 performs a text segmentation and label assignment to sections of the text on the basis of the unstructured text provided by the unstructured text module 512. The speech recognition module makes further use of the language models stored and provided by the statistical model module. In this way the statistical model module provides language models for the text segmentation as well as language models for the speech recognition. The latter are typically of a different type compared to language models for text segmentation because speech recognition usually makes use of trigrams whereas text segmentation usually employs unigrams.

When the processing unit 516 has performed a text segmentation and an assignment of labels to text sections as section headings, the so generated structured text is stored in the structured text module 518. The structured text module is connected to the graphical user interface 520 in order to provide the structured text stored in the structured text module 518 to the user 506 by means of the graphical user interface 520. The user 506 can interact via the input device 504 with the segmentation system. Therefore the input device 504 is connected to the graphical user interface 520 and to the processing unit 516. When the user 506 introduces modifications of either the text structuring or the label assignment, the processing unit 516 performs a restructuring and a reassignment of the structured text stored in the structured text module 518. The restructured and reassigned structured text is repeatedly provided to the user until the performed modifications match the user's preferences. When no further changes are introduced by the user the structured text stored in the structured text module 518 is transmitted to the external storage device 508.

Furthermore structured text stored in the structured text module 518 can also be exploited for improved speech recognition that is performed by means of the speech recognition module 510. Therefore, the structured text module 518 is directly connected

to the speech recognition module 510. Making use of this context specific feedback allows a more precise and specific speech recognition procedure to be performed by the speech recognition module 510.

- 5 The invention therefore provides a method of document structuring and assigning of labels to text sections serving as section headings. Especially in the field of automatic speech recognition and automatic speech transcription the proofreading task to be performed by a human proof reader is extremely facilitated. For the proposed segmentation of the text, it is much easier for the proof reader to check whether the text
- 10 following some heading really represents a section of the corresponding type as opposed to conventional proof reading procedures where a portion of text has to be examined, a section has to be determined and a heading has to be inserted into the text by jumping back to the beginning of a section.
- 15 Furthermore the method supplies alternative section boundaries as well as alternative section labels that can easily be selected by the proof reader. Moreover during a proof reading process the system learns the most frequent corrections introduced by the proof reader and makes use of this information for future applications.



LIST OF REFERENCE NUMERALS

	400	user interface
	402	text window
5	404	suggestion window
	406	label
	408	pointer
	410	label list
	412	label
10	414	label
	416	label
	418	user input field
	500	segmentation system
	502	speech
15	504	input device
	506	user
	508	external storage device
	510	speech recognition module
	512	unstructured text module
20	514	statistical model module
	516	processing unit
	518	structured text module
	520	graphical user interface

**CLAIMS**

1. A method of segmentation of a text (512) into text sections and assigning a topic to each text section on the basis of annotated training data, the method comprising the steps of:
    - 5           - segmenting the text (512) into text sections by making use of statistical models (514) extracted from training data,
    - assigning a topic being indicative of the content of the text section to each text section by making use of the statistical models extracted from the training data,
    - 10          - generating a structured text by inserting a label as a section heading into the text in order to assign the label to the text section,
    - providing the structured text to a user (506),
    - processing of modifications of the structured text in response to a user's review.
  - 15   2.     The method according to claim 1, wherein the topic assigned to a text section is further assigned to a set of labels (410), one of which being assigned to the text section and inserted as section heading into the text.
  - 20   3.     The method according to claim 1 or 2, wherein providing the structured text to a user further comprises for each text section providing the set of labels (410) assigned to the topic that is assigned to the text section.
  - 25   4.     The method according to any one of the claims 1 to 3, wherein the text modification comprises a modification of the segmentation of the text into sections and/or a modification of the assignment between a label and a text section.
-

5. The method according to claim 3 or 4, wherein the modification of the structured text comprises:

- assigning a label to a text section by selecting one label (412, 414,...) of the set of labels (410) assigned to the topic that is assigned to the text section,
- re-defining a section boundary by selecting an assigned label (406) at a first position in the text and moving the assigned label to a second position within the text, the second position defining the section boundary, and the selected label defining the section heading,
- entering a label and assigning the entered label to the text section.

10

6. The method according to any one of the claims 1 to 5, wherein the processing of modifications of the structured text (518) comprises performing modifications in the text in response to the user's review and successively triggering the steps of:

- re-segmenting the text into text sections by making use of the statistical models (514) extracted from the training data and by making reference to the performed modifications,
- re-generating a structured text (518) by inserting a label as a section heading into the text by making reference to the performed modifications, assigning the label to the text section and providing the structured text to the user for review.

15

20

7. The method according to any one of the claims 1 to 6, wherein the processing of modifications of the structured text comprises replacing a text portion by a label within the text, when the replaced text portion is identified as a formulation describing a section heading.

25

8. The method according to any one of the claims 1 to 7, wherein the granularity of the text segmentation is controlled by the user by means of a customizable granularity parameter.

9. The method according to any one of the claims 1 to 8, wherein the modifications of the structured text are logged and analyzed in order to adapt the statistical models.
- 5
10. A text segmentation system (500) for segmenting a text (512) into text sections and assigning a topic to each text section on the basis of annotated training data, the text segmentation system comprising:
- means for segmenting the text (512) into text sections by making use of
  - 10 statistical models (514) extracted from the training data,
  - means for assigning a topic being indicative of the content of the text section to each text section by making use of the statistical models extracted from the training data, the topic being further assigned to a set of labels (410),
  - means for generating a structured text (518) by inserting one label of the set of
  - 15 labels as a section heading into the text in order to assign the label to the text section,
  - means for providing (520) the structured text to a user (506),
  - means for processing (516) of modifications of the structured text in response to a user's review.
- 20
11. The text segmentation system according to claim 10, wherein means for processing of modifications (516) of the structured text (518) are adapted to perform a modification of the segmentation of the text into sections and/or a modification of the assignment between a label and a text section.
- 25
12. The text segmentation system according to claim 10 or 11, wherein means for processing of modifications of the structured text are further adapted to perform:
- assigning a label to a text section by selecting one label (412, 414,...) of the set of labels (410) assigned to the topic that is assigned to the text section,

- re-defining a section boundary by selecting an assigned label (406) at a first position in the text and moving the assigned label to a second position within the text, the second position defining the section boundary, and the selected label defining the section heading,

5 - entering a label and assigning the entered label to the text section.

13. The text segmentation system according to any one of the claims 10 to 12, wherein the means for processing of modifications (516) of the structured text (518) are adapted to perform modifications in the text in response to the user's review and further comprising means for successively triggering the steps of:
- 10
- re-segmenting the text into text sections by making use of the statistical models (514) extracted from the training data and by making reference to the performed modifications,
  - re-generating a structured text by inserting a label as a section heading into the
- 15
- text by making reference to the performed modifications, assigning the label to the text section and providing the structured text to a user for review.

14. The text segmentation system according to any one of the claims 10 to 13, further comprising means for logging and analyzing the performed modifications
- 20
- of the structured text, the means for logging and analyzing being adapted to adapt the statistical models (514).

- 15 A computer program product for segmenting a text (512) into text sections and assigning a topic to each text section on the basis of annotated training data, the
- 25
- computer program product comprising program means for:

- segmenting the text into text sections by making use of statistical models (514) extracted from the training data,
- assigning a topic being indicative of the content of the text section to each text section by making use of the statistical models extracted from the training



data, the topic being further assigned to a set of labels (410),

- generating a structured text (518) by inserting one label (412, 414,...) of the set of labels (410) as a section heading into the text in order to assign the label to the text section,

- 5        - providing the structured text to a user (506),
- processing of modifications of the structured text (518) in response to a user's review.

10       16.    The computer program product according to claim 15, wherein the program means for processing of modifications of the structured text are adapted to perform a modification of the segmentation of the text into sections and/or a modification of the assignment between a label and a text section, for the modification of the assignment between a label and a text section the program means are further adapted to perform the steps of:

- 15       - assigning a label to a text section by selecting one label of the set of labels assigned to the topic that is assigned to the text section,
- re-defining a section boundary by selecting an assigned label at a first position in the text and moving the assigned label to a second position within the text, the second position defining the section boundary, and the selected label
- 20       defining the section heading,
- entering a label and assigning the entered label to the text section.

25       17.    The computer program product according to claim 15 or 16, wherein the program means for processing of modifications of the structured text are adapted to perform modifications in the text in response to the user's review and further comprising program means for successively triggering the steps of:

- re-segmenting the text into text sections by making use of the statistical models extracted from the training data and by making reference to the performed modifications,

- re-generating a structured text (518) by inserting a label as a section heading into the text by making reference to the performed modifications, assigning the label to the text section and providing the structured text to the user for review.

5

18. A user interface (400) for a text segmentation system for segmenting a text into text sections and assigning a topic to each text section on the basis of annotated training data, the user interface comprising:

10

- means for providing the structured text to a user that has been structured by making use of statistical models extracted from the training data,
- means for providing a set of labels (410) to the user, the set of labels being assigned to each topic that is assigned to each text section,
- input means (408) for processing modifications of the structured text in response to a user's review,
- means for logging and analyzing processed modifications of the structured text in order to train the statistical models.

15

19. The user interface according to claim 18, wherein the structured text is provided to a user by means of a graphical user interface (400; 502) and wherein the input means (408, 418; 504) are adapted to process modifications of the structured text in form of the user selecting one label (412, 414,...) of the provided set of labels (410), the selected label being assigned to the text section.

20

20. The user interface according to claim 18 or 19, further comprising means for providing text that has been re-segmented and re-labelled in response to the user's review by making use of the statistical models and by making reference to the processed modifications.

25

**ABSTRACT**

Text segmentation and label assignment with user interaction by means of topic-specific language models

5 The invention relates to a method, a computer program product, a segmentation system and a user interface for structuring an unstructured text by making use of statistical models trained on annotated training data. The method performs text segmentation into text sections and assigns labels to text sections as section headings. The performed segmentation and assignment is provided to a user for general review. Additionally,  
10 alternative segmentations and label assignments are provided to the user being capable to select alternative segmentations and alternative labels as well as to enter a user defined segmentation and user defined label. In response to the modifications introduced by the user, a plurality of different actions are initiated incorporating the re-segmentation and re-labelling of successive parts of the document or the entire  
15 document. Furthermore the method comprises a learning functionality, logging and analyzing user introduced modifications for adaptation of the method to the user's preferences and for further training of the statistical models.

(figure 2)

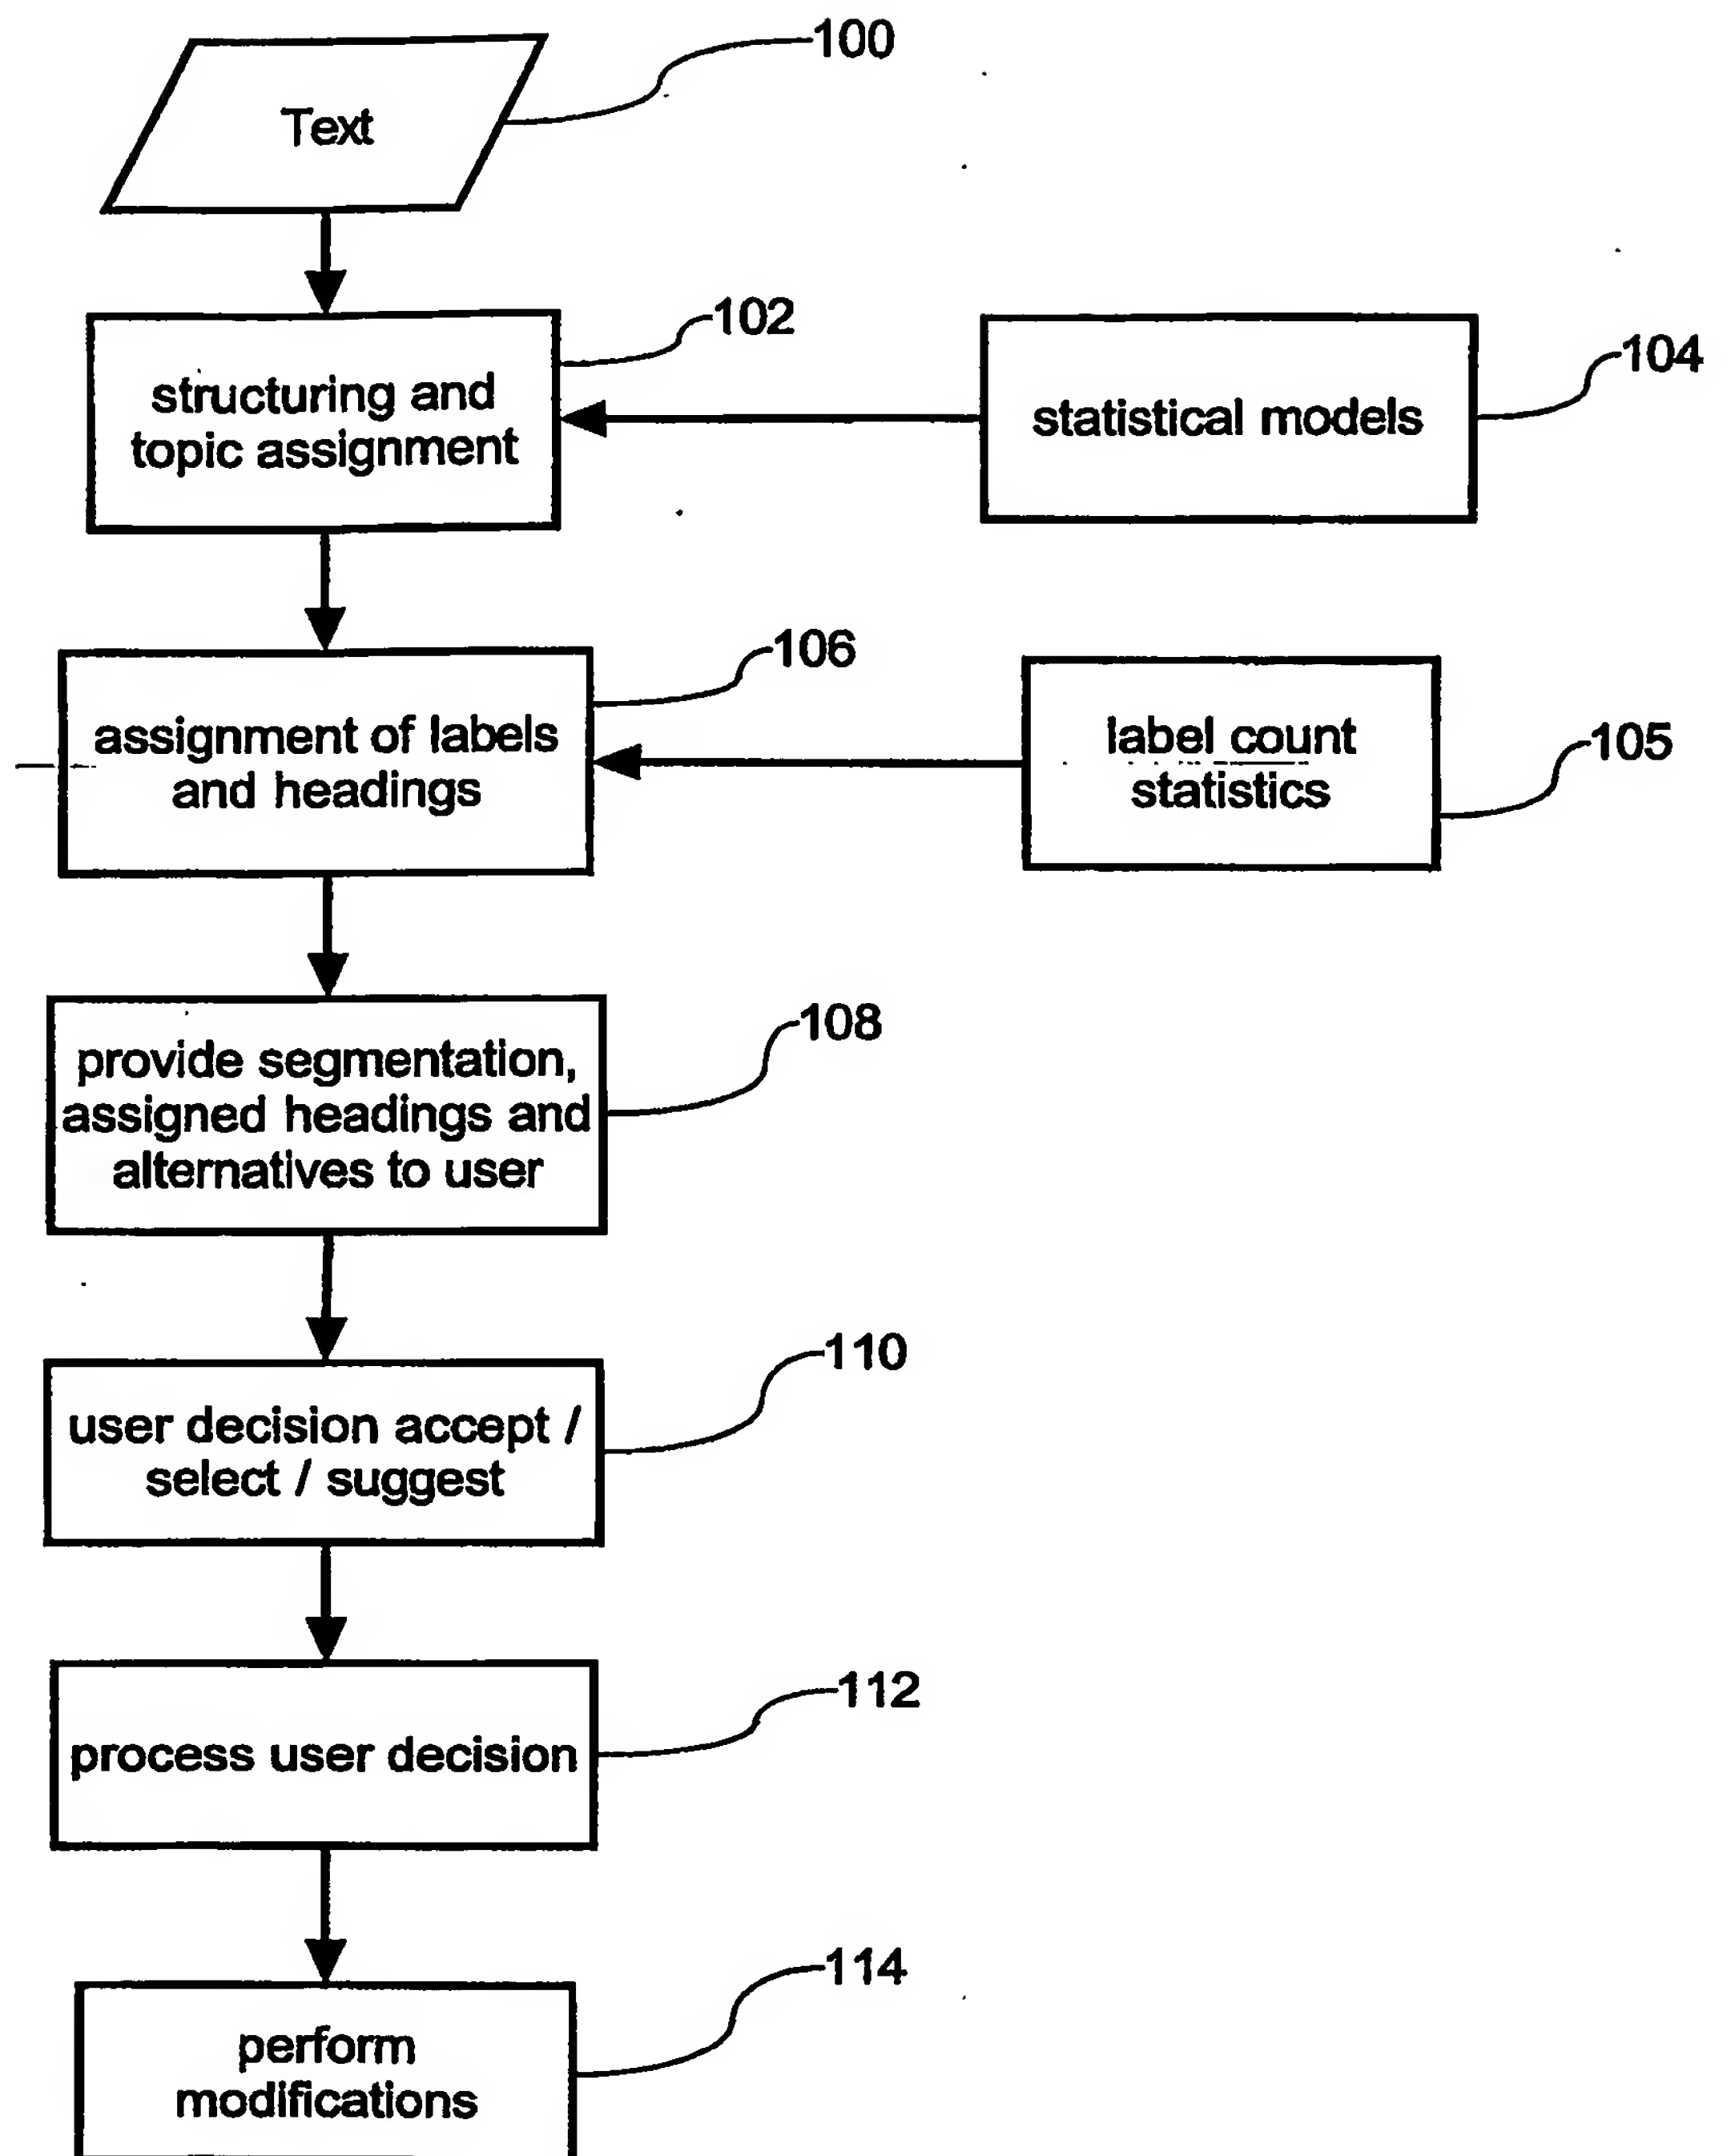


Fig. 1

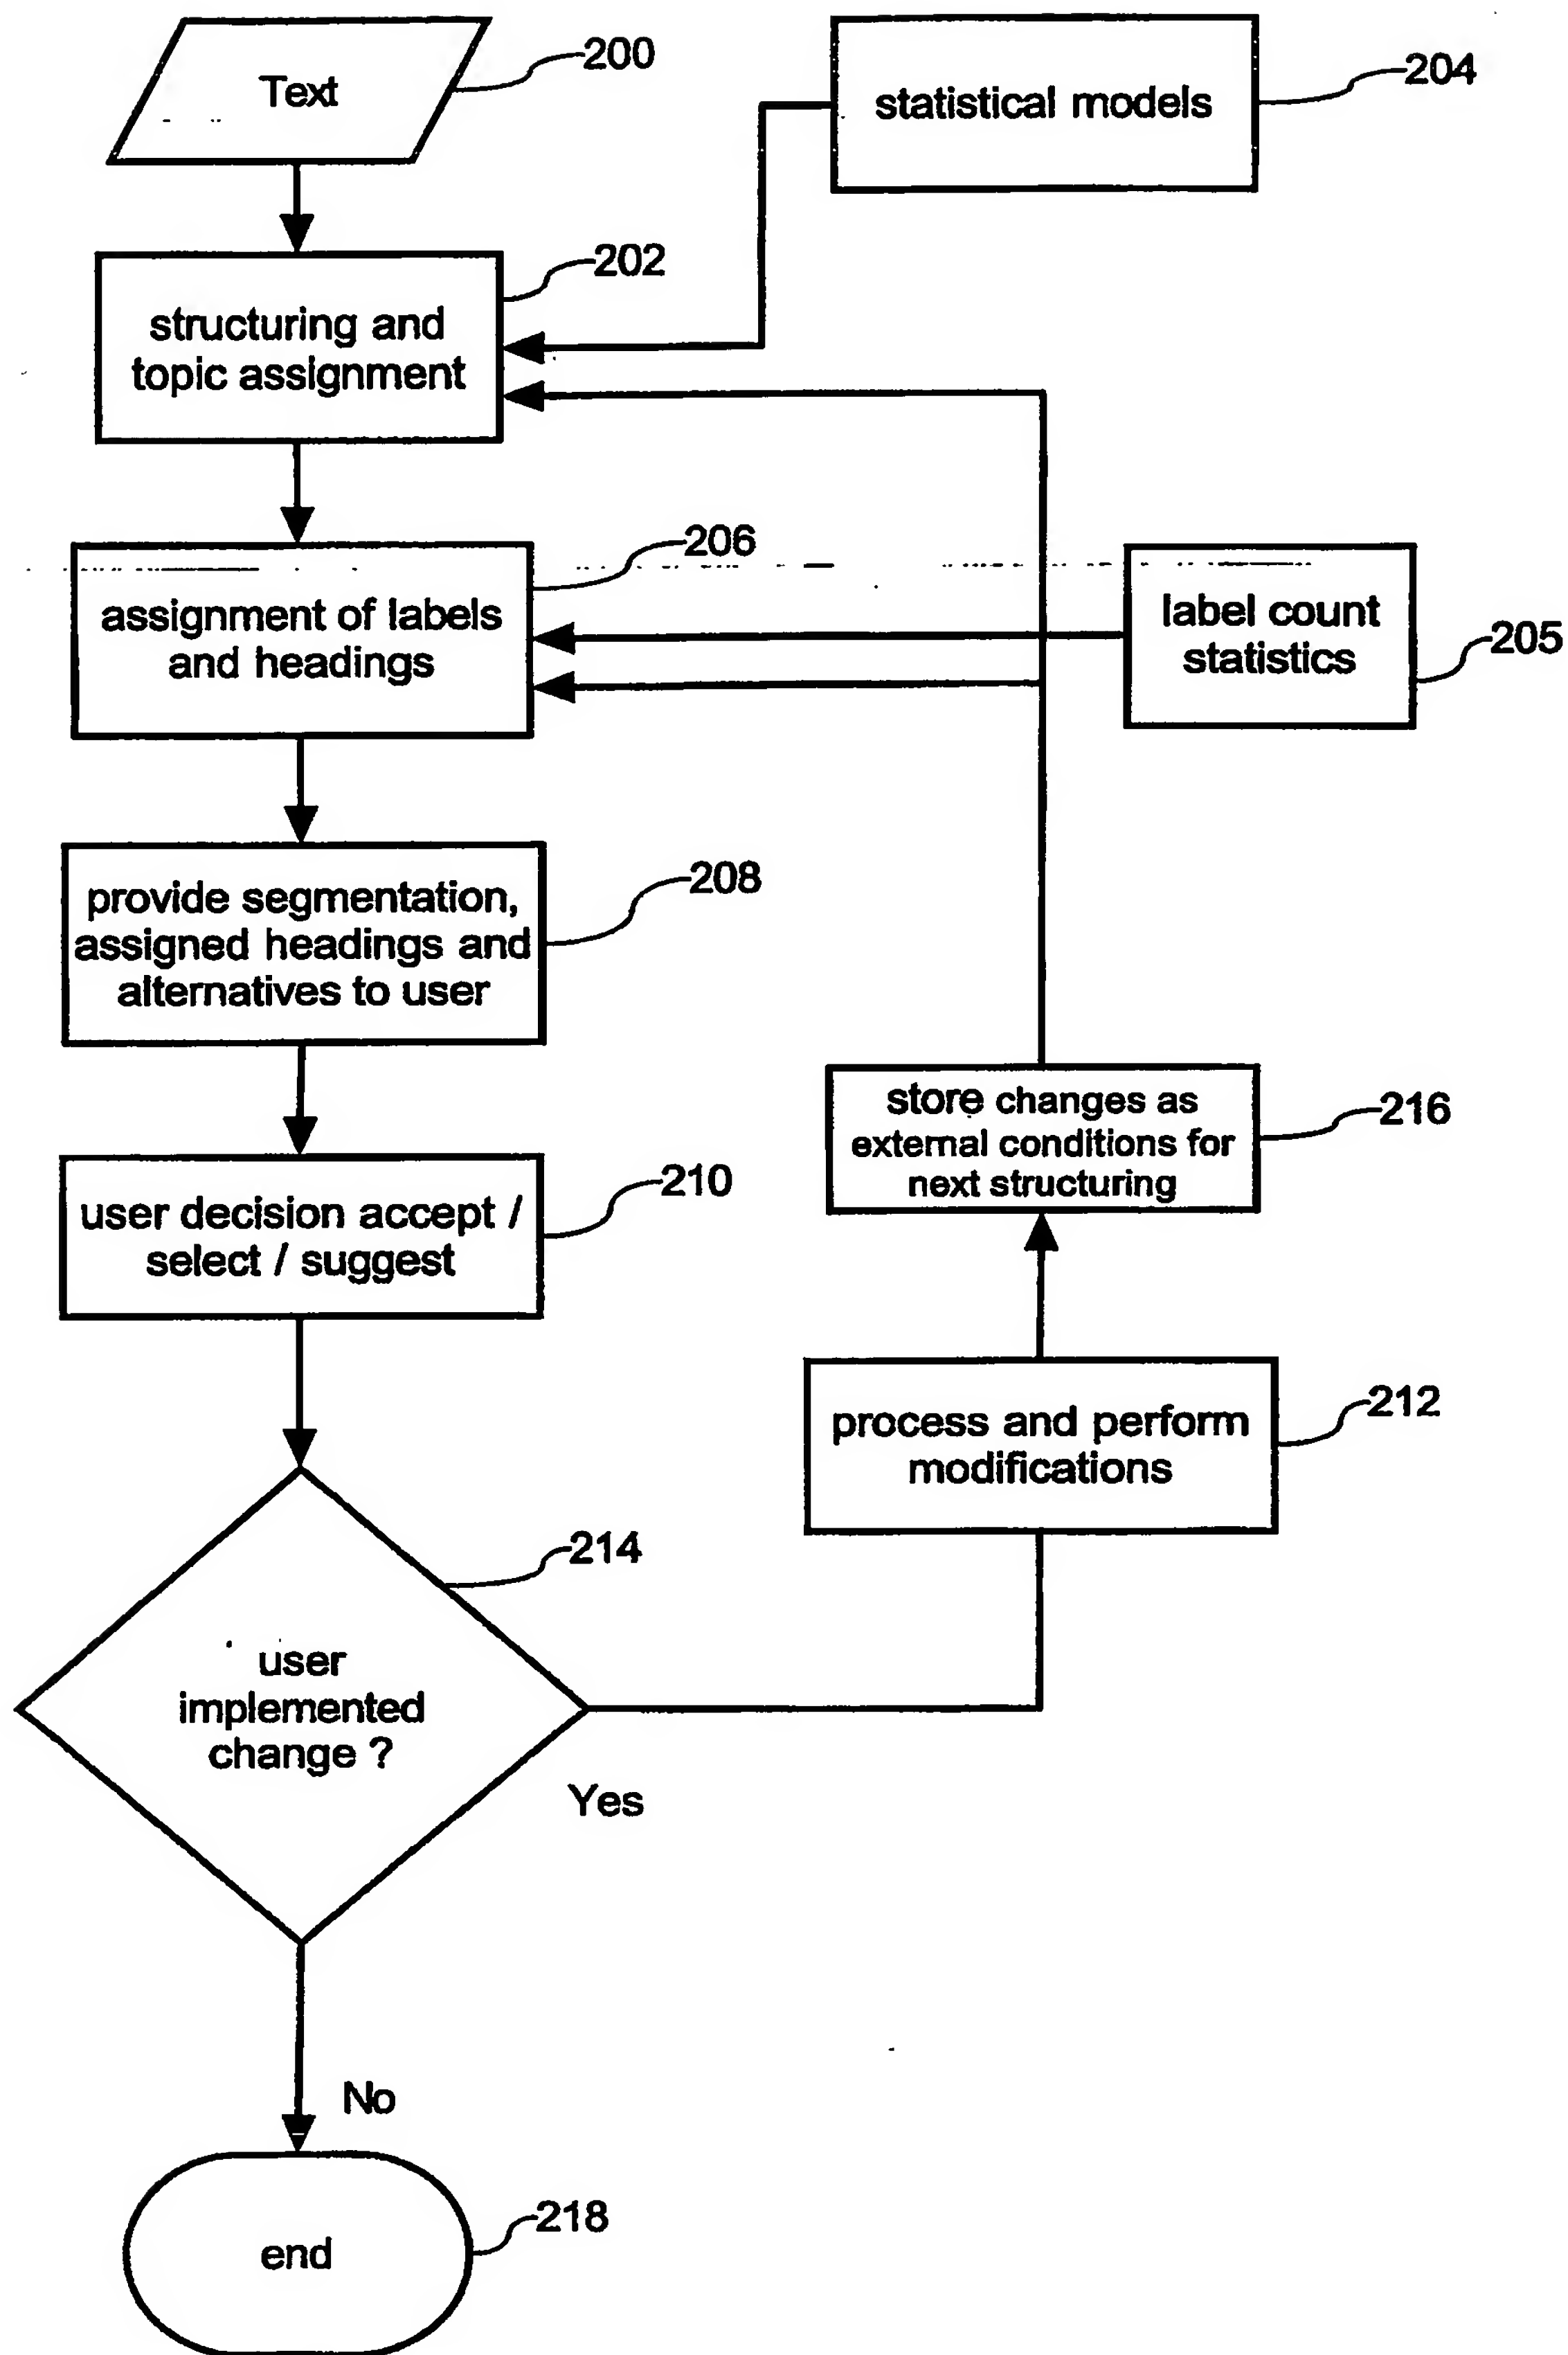


Fig. 2



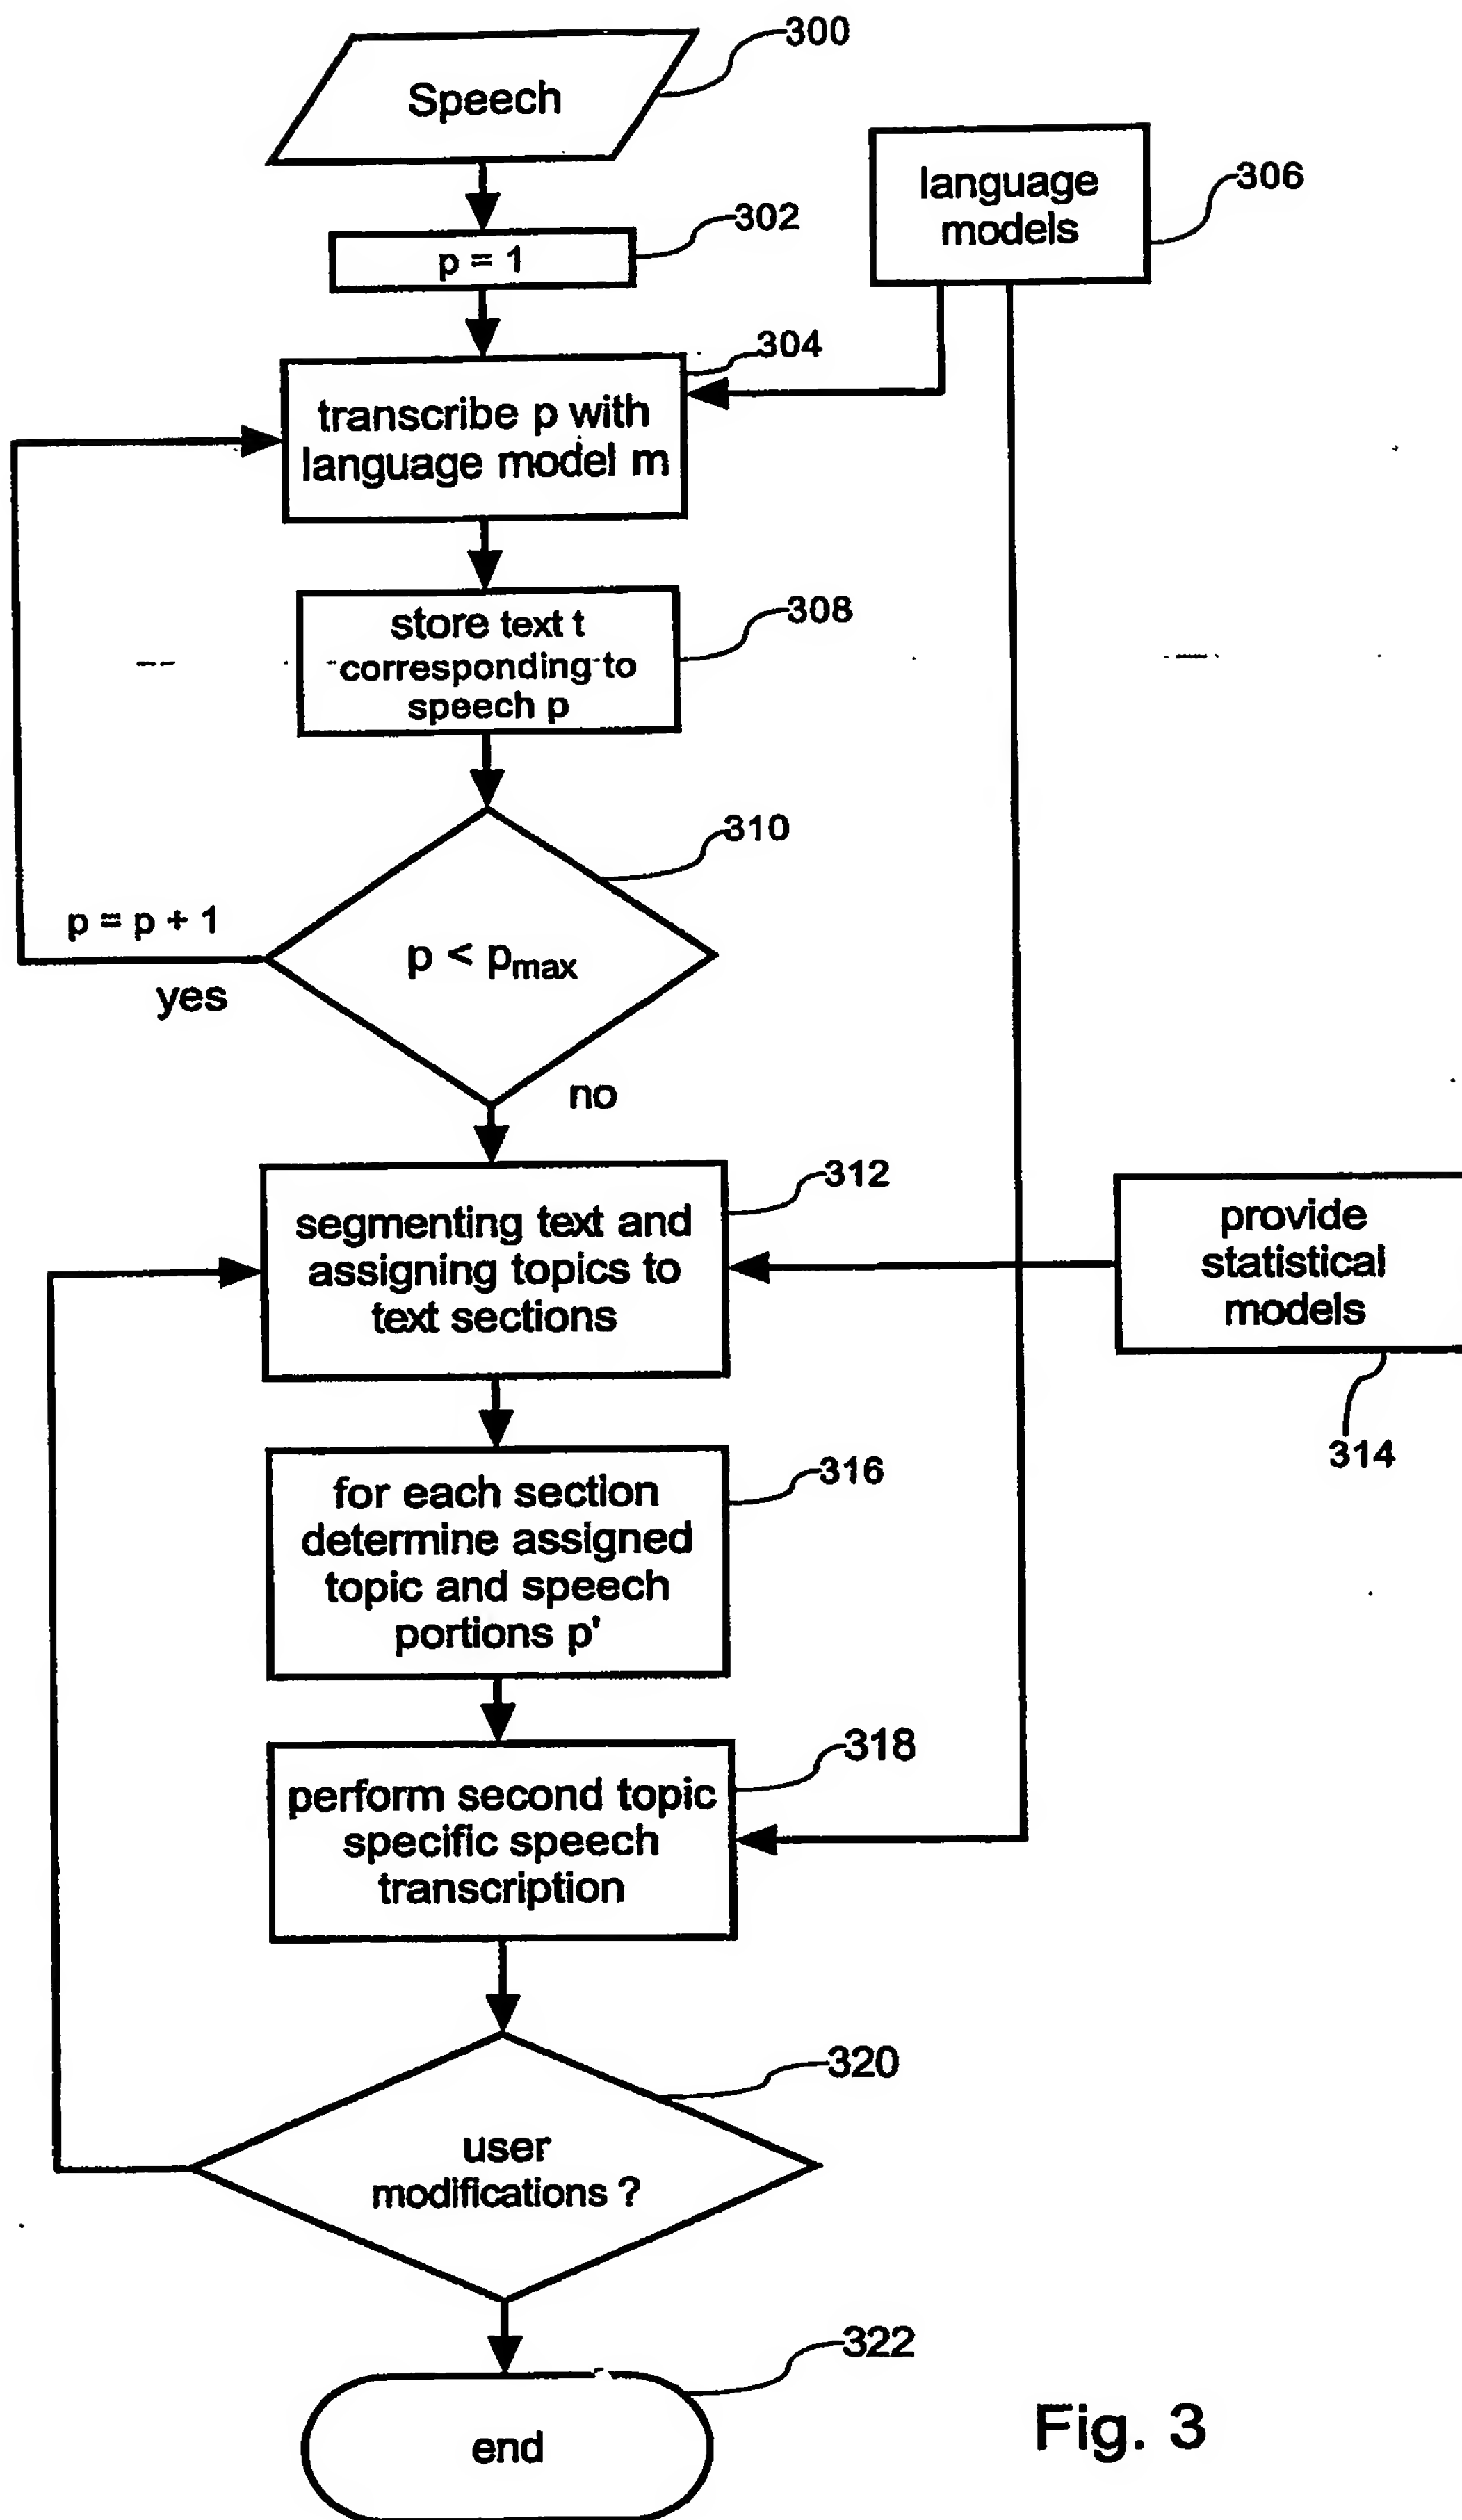


Fig. 3

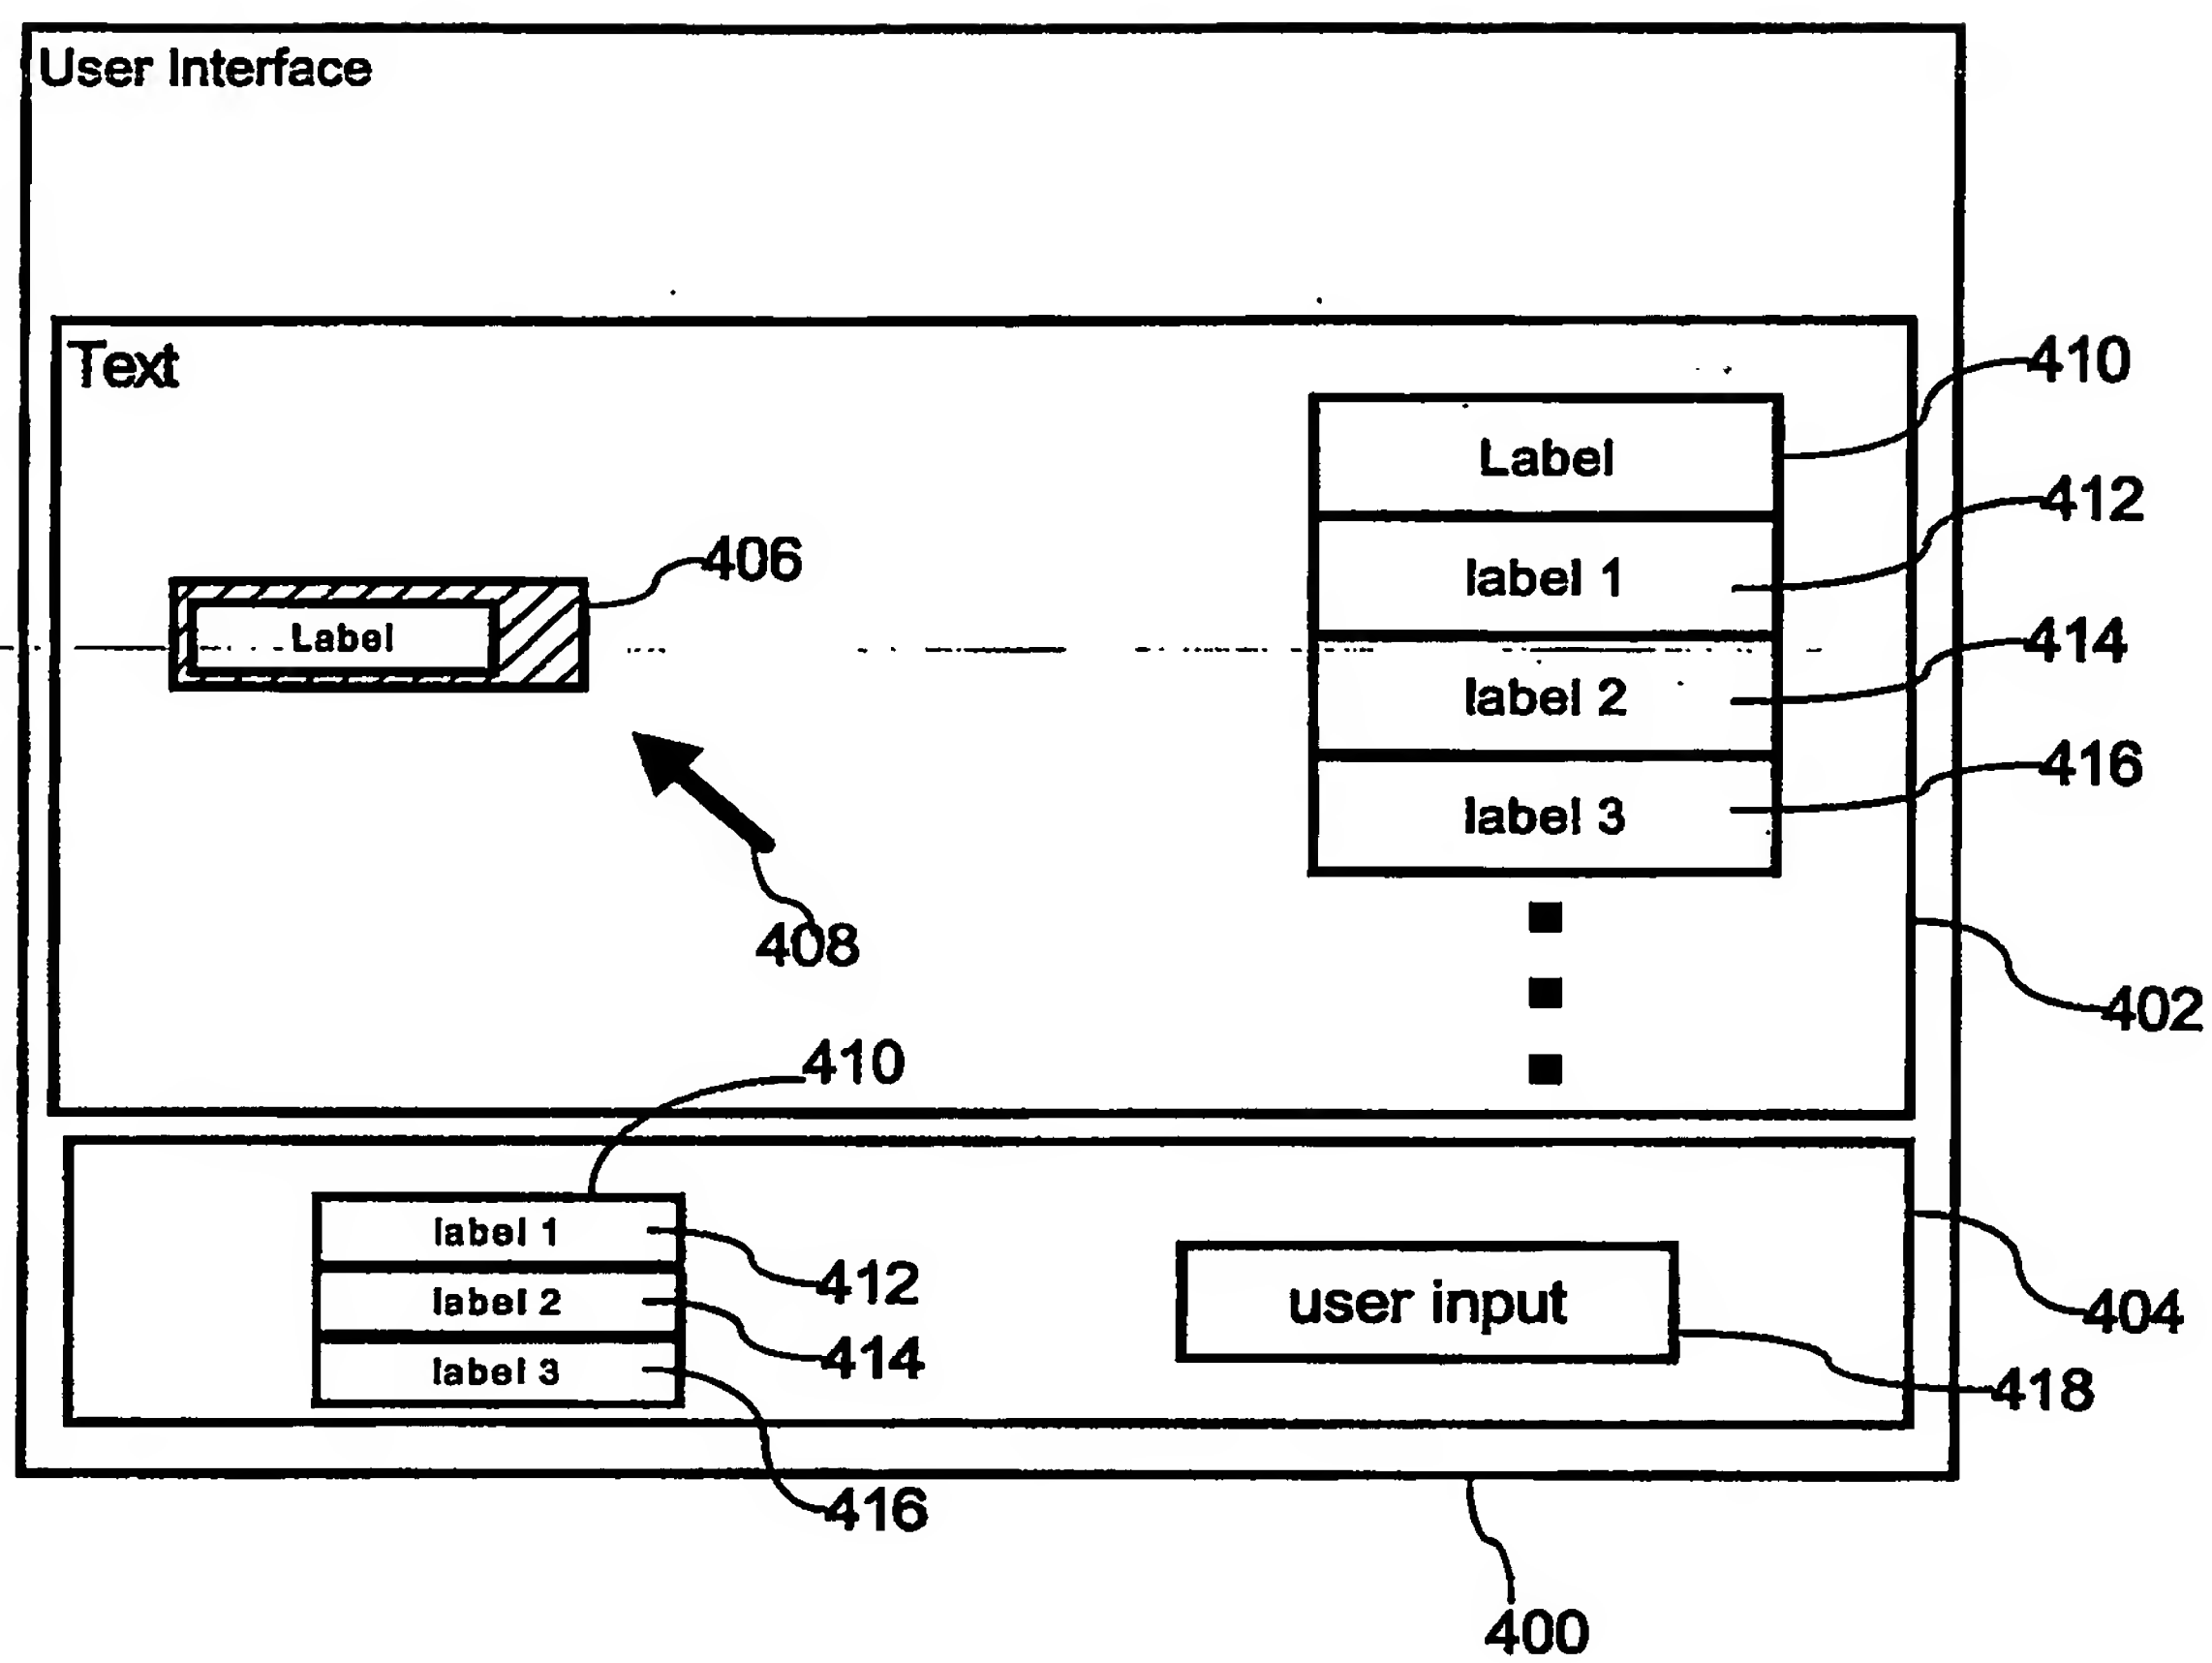


Fig. 4


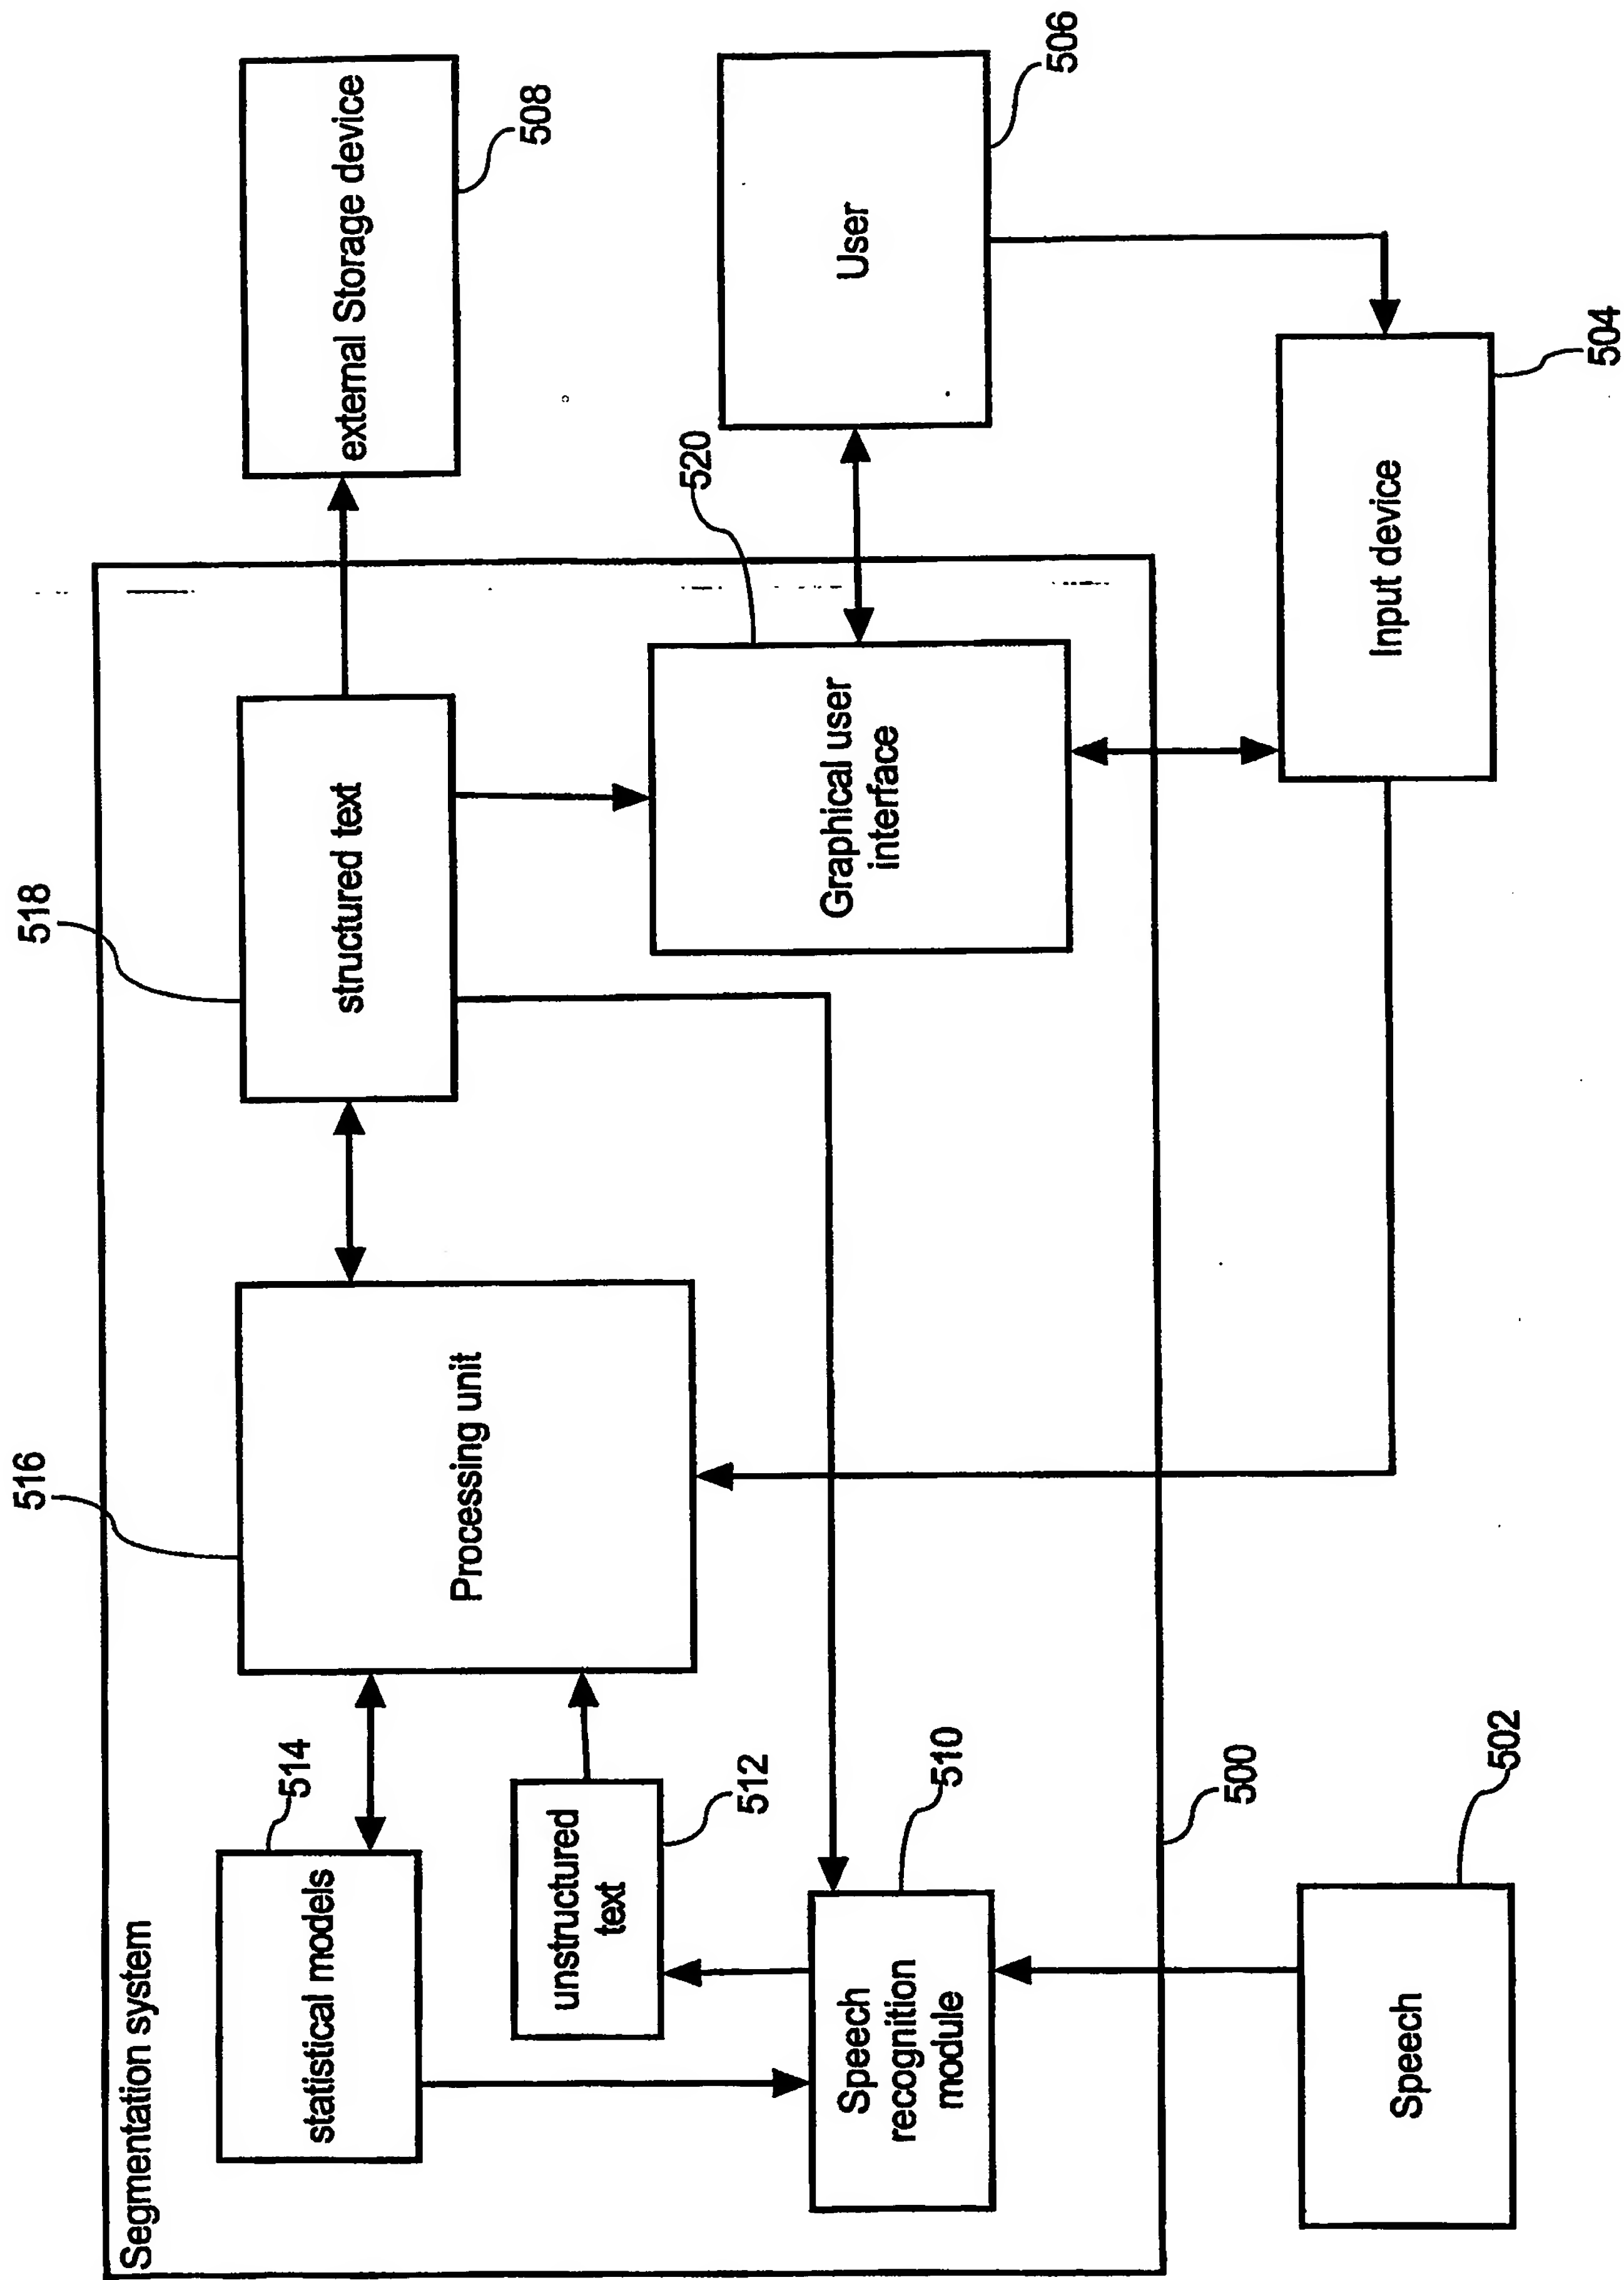


Fig. 5

PCT/IB2004/052405

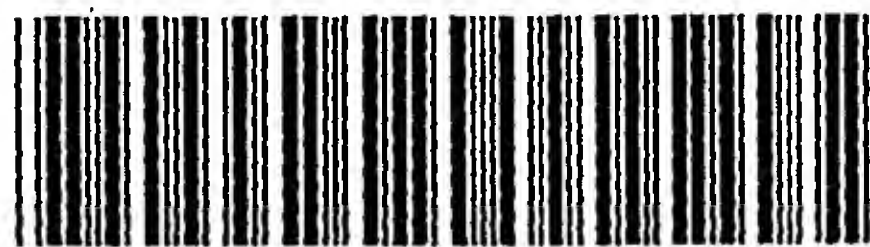

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**